



**swellco**  
wonderful walls...

**SIGNATURE**  
COLLECTION

INSPIRE SERIES





CURATED  
INSPIRATION TO  
CRAFT YOUR  
VISION

**WHERE NATURE  
MEETS MINIMALISM  
TO CREATE STUNNING  
DESIGNS**

Inspired by the beauty of nature and the elegance of minimalist design, these tiles are the perfect addition to any space. Our designers drew inspiration from the simplicity and tranquility of nature, incorporating natural colors and textures into the tile's design. The result is a tile that's both understated and elegant, with a subtle organic feel that brings a sense of calm to any room.

## S I Z E & F I N I S H E S

---

**600x  
1200mm**

---

**Signature  
Collection**

**High Glossy  
Finish**

Our high gloss inspire finish tiles from our signature collection are a modern marvel that demand attention with their mesmerizing shine and luster. These tiles are a statement piece that exude boldness and confidence, making them perfect for those who dare to create a truly standout space. The sleek and highly polished surface of the high gloss tiles exudes a contemporary and luxurious vibe, elevating the overall aesthetic of the space to a whole new level.



## TECHNICAL SPECIFICATIONS

---



Long  
Durability



Easy to  
Clean



Impact  
Resistance



Hygienic  
Surface



Fire  
Resistance



Chemical  
Resistance



Frost  
Resistance



Low Water  
Absorption



Dimensional  
Stability



Easy  
Installation



Thermal  
Resistance



Crazing  
Resistance

## S U I T A B L E A P P L I C A T I O N S

---



Residential



Commercial  
Building



Hotel,  
Restoaurant



Hospital



Airport



School,  
College



Gymnasium



Hall &  
corridor



Mall & Super  
Market



Industry



Spa



Religious  
Place

# INTERACTIVE GUIDE




**Please Click**  
the corresponding tiles  
to view specific tile details.



**Click on the Logo**  
to return to the previous  
index page.



FLORITO GREEN

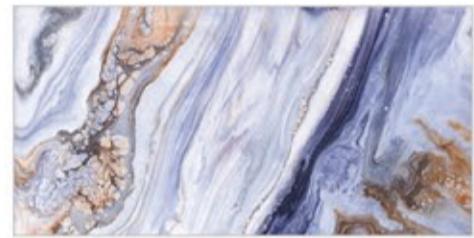

NEBULA AZUL



NEBULA BROWN



ROSSATA




THUNDER BLACK



THUNDER MULTY



TRAVAS RED

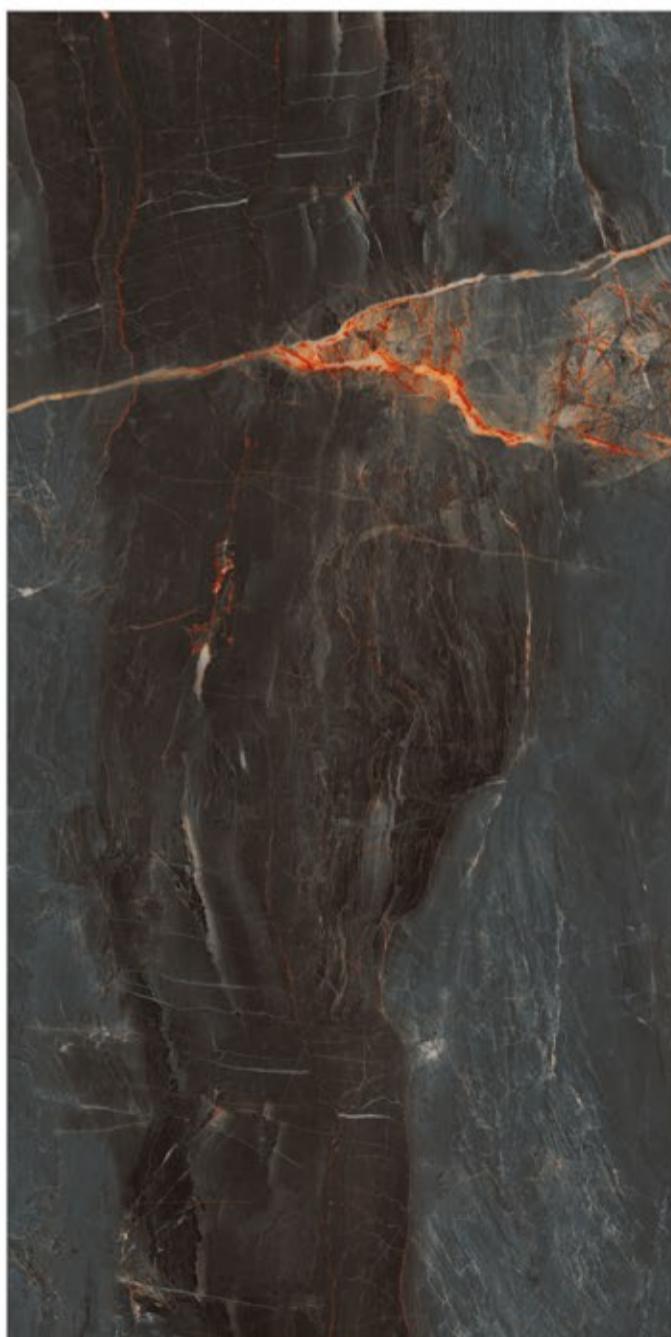

## FLORITO GREEN

RANDOM DESIGN



600x  
1200mm

High Glossy  
Surface



**600x  
1200mm**



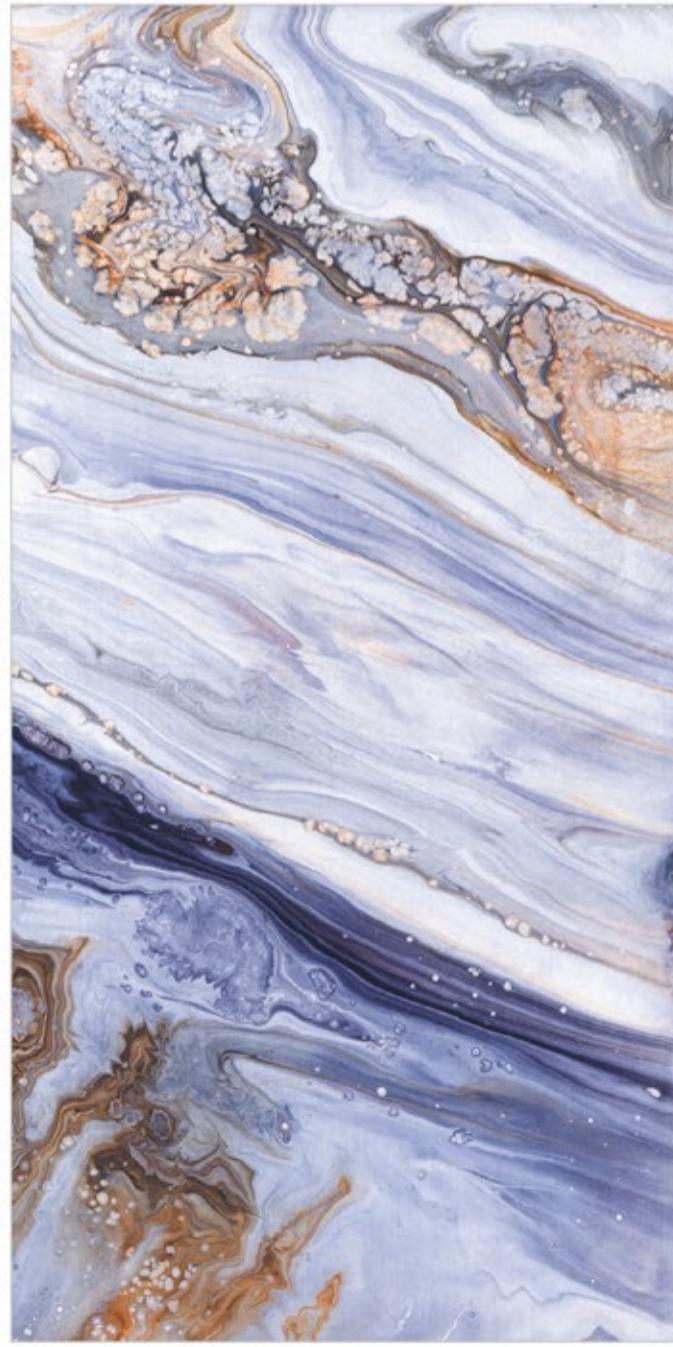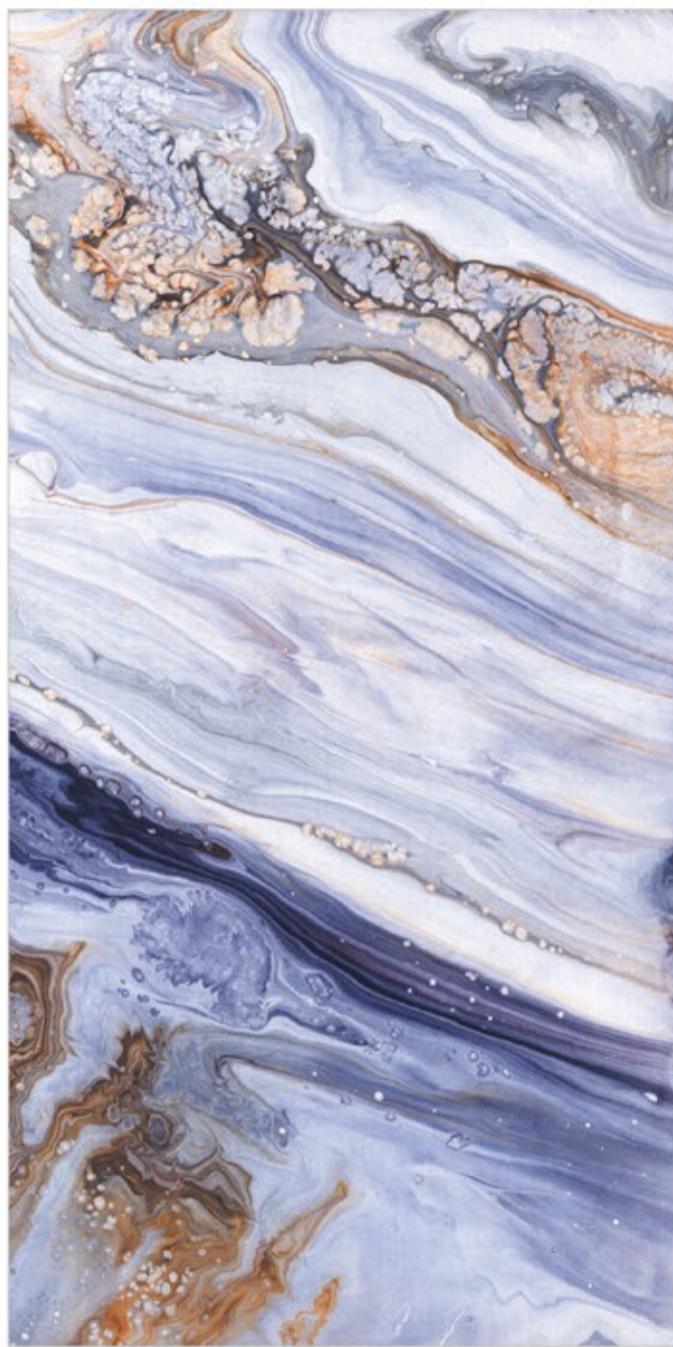

## NEBULA AZUL

RANDOM DESIGN



600x  
1200mm

High Glossy  
Surface



600x  
1200mm



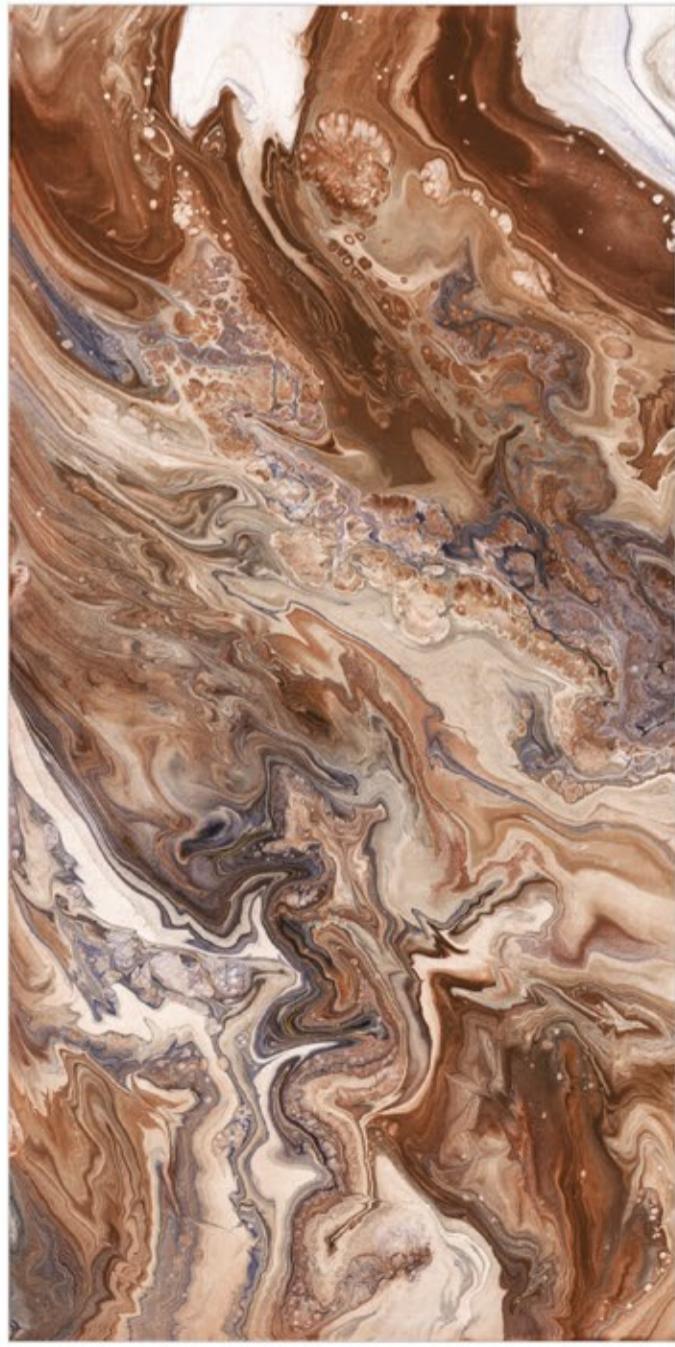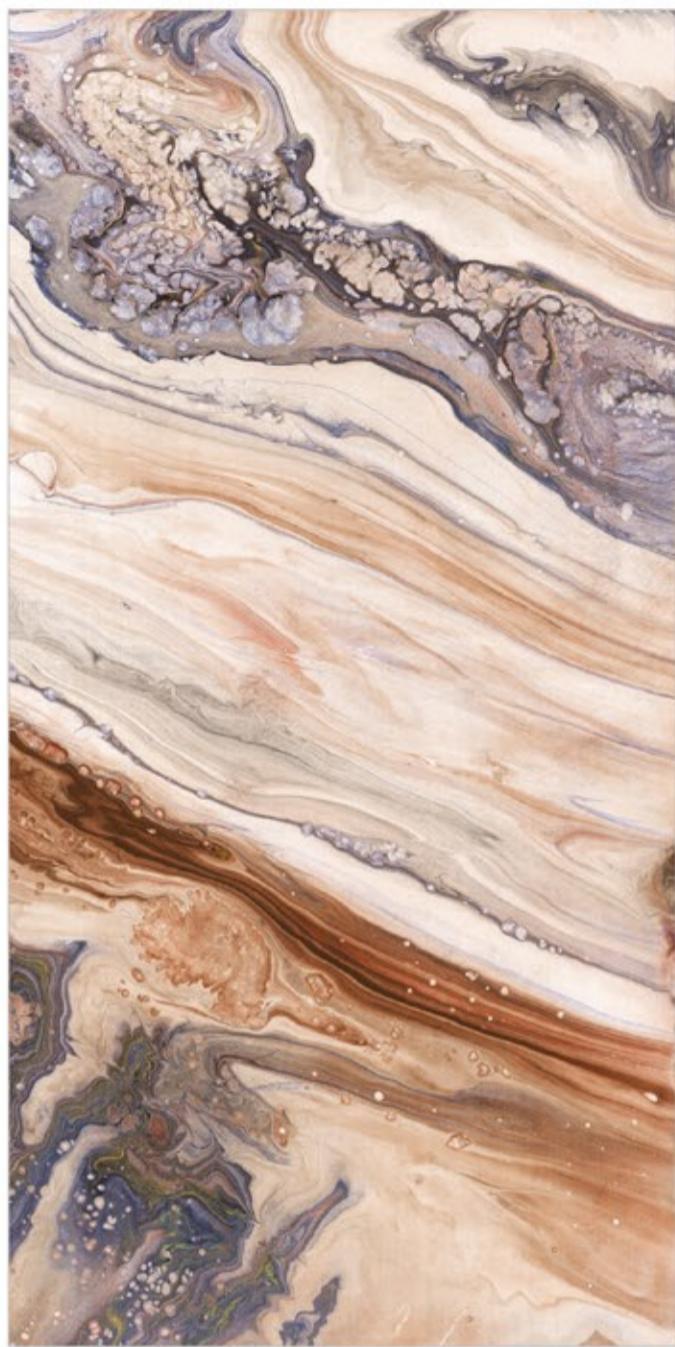

## NEBULA BROWN

RANDOM DESIGN

600x  
1200mm

High Glossy  
Surface



600x  
1200mm





## ROSSATA



RANDOM DESIGN

600x  
1200mm

High Glossy  
Surface

**600x  
1200mm**



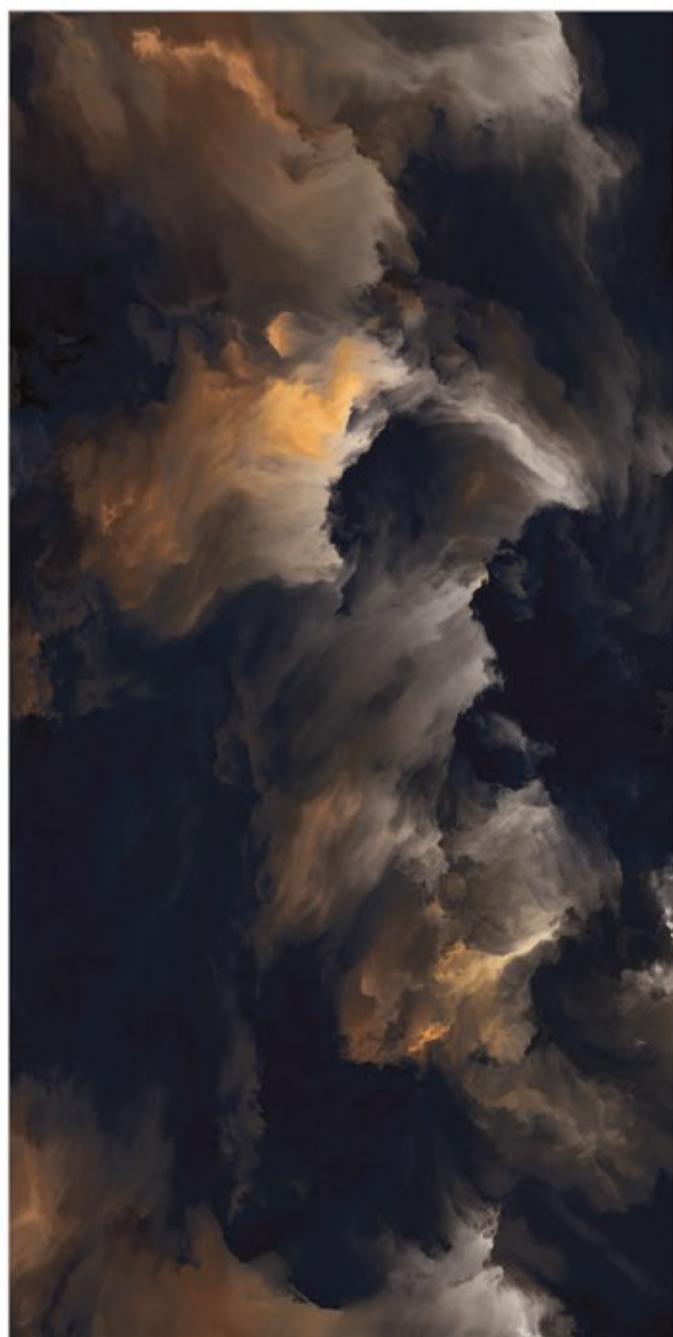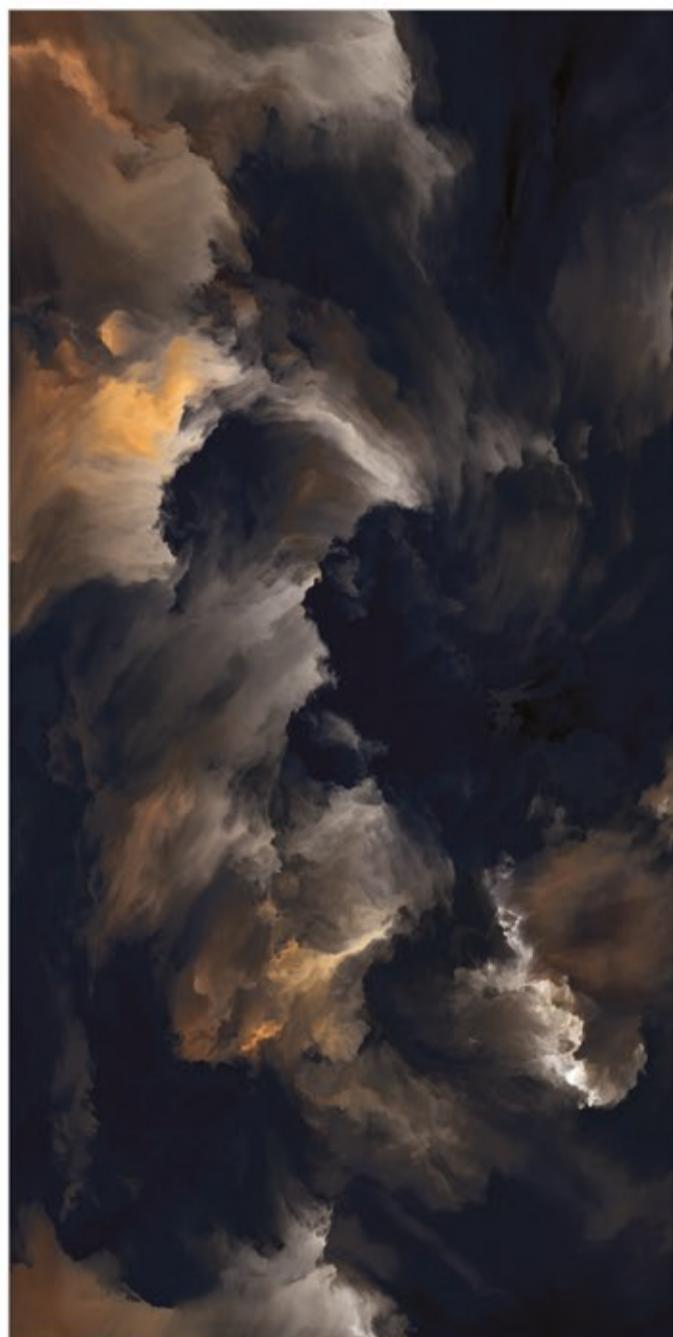

## THUNDER BLACK

RANDOM DESIGN

600x  
1200mm

High Glossy  
Surface



600x  
1200mm





## THUNDER MULTY

RANDOM DESIGN

600x  
1200mm

High Glossy  
Surface

600x  
1200mm





## TRAVAS RED

RANDOM DESIGN

600x  
1200mm

High Glossy  
Surface

**600x  
1200mm**



# TECHNICAL SPECIFICATIONS

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP Bla	MEAN VALUE OF OUR POLISHED GVT	MEAN VALUE	STANDARD TEST METHOD
<b>REGULATORY PROPERTIES</b>				
Length and Width	± 0.5 %	± 0.1 %	± 0.1 %	ISO 10545-2
Thickness	± 5.0 %	± 4.0 %	± 4.0 %	ISO 10545-2
Straightness of Sides	± 0.5 %	± 0.1 %	± 0.1 %	ISO 10545-2
Rectangularity	± 0.5 %	± 0.1 %	± 0.1 %	ISO 10545-2
Surface Flatness	± 0.5 %	± 0.2 %	± 0.2 %	ISO 10545-2
Color difference	Unaltered	No change	No change	ISO 10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
<b>STRUCTURAL PROPERTIES</b>				
Water Absorption	± 0.50 %	± 0.20 %	± 0.20 %	ISO 10545-3
Apparent density	± 2.0 g/cc	± 2.10 g/cc	± 2.10 g/cc	DIN 51082
<b>MASSIVE MECHANICAL PROPERTIES</b>				
Modulus of Rupture	Min. 34 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO 10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO 10545-5
<b>SURFACE MECHANICAL PROPERTIES</b>				
Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO 10545-7
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101
<b>TERMO HYGROMETRIC PROPERTIES</b>				
Frost Resistance	No damage	No damage	No damage	ISO 10545-12
Thermal Shock Resistance	No damage	No damage	No damage	ISO 10545-9
Moisture expansion	Nil	Nil	Nil	ISO 10545-10
Thermal expansion (COE)	Max. 9.0 x 10.6	Max. 6.5 x 10	Max. 6.5 x 10	ISO 10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-11
<b>CHEMICAL PROPERTIES</b>				
Chemical resistance	No damage	No damage	No damage	ISO 10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO 10545-14
<b>SAFETY PROPERTIES</b>				
Slip resistance	As per mfg.	>4.40	>4.40	ISO 10545-17
Stain resistance	As per mfg.	Fireproof	Fireproof	N.A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Does not field Pb & Cd	Does not field Pb & Cd	ISO 10545-15

## Packing Detail:

Tile Size	No. of Tiles Per Box	Coverage Area (Approx.)	Box Weight (Kgs. Approx.)
600x1200mm	2 Pcs.	1.44 Sq. Mtr.	29

